



DNM DESIGN


3 DNM Stereo Solid Core high resolution audio cables including 2 new DNM speaker cables!

All New-- DNM Stereo Solid Core Resolution speaker cable for all normal sensitivity loudspeakers

specifications

4 x 1.3mm diameter copper conductors
resistance 0.013ohms/metre
capacitance 17pF/metre,
inductance 1.03uH/metre

cable directionality when new
align signal in the print read direction

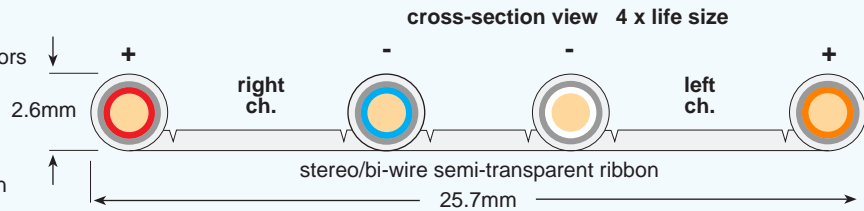

top view life size




the semi-transparent ribbon with neutral-grey conductors blends into its background

All New-- DNM Stereo Solid Core Precision 2 speaker cable for high sensitivity loudspeakers (above 89db/w 6 ohms minimum)

specifications

4 x 0.82mm diameter copper conductors
resistance 0.03ohms/metre
capacitance 17pF/metre,
inductance 1.03uH/metre

cable directionality when new
align signal in the print read direction

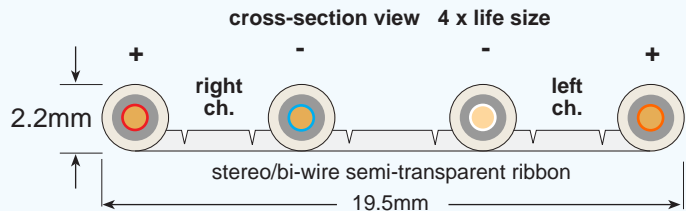

top view life size




the semi-transparent ribbon with neutral-grey conductors blends into its background

DNM Stereo Solid Core Interconnect cable

specifications

unshielded cable
4 x 0.4mm diameter copper conductors
resistance 0.134 ohms/metre
capacitance 13.2pF/metre
inductance 1.32uH/metre

cable directionality when new
align signal in the print read direction

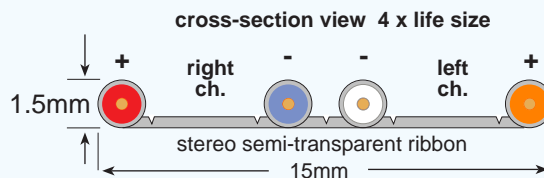

top view life size

