




## DNM Stereo Solid Core high resolution cables

### DNM Stereo Solid Core Speaker cable

For normal sensitivity / impedance loudspeakers (below 90db/w 3 ohms minimum)

#### specifications

4 x 1mm diameter conductors  
 resistance 0.021ohms/metre  
 capacitance 14pF/metre,  
 inductance 1.13uH/metre  
 directionality--signal flow in  
 print read direction


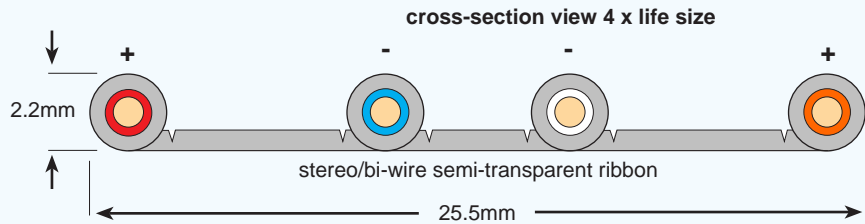


### DNM Stereo Solid Core Precision speaker cable

For high sensitivity / impedance loudspeakers (above 90db/w 6 ohms minimum)

#### specifications

4 x 0.65mm diameter conductors  
 resistance 0.053 ohms/metre  
 capacitance 15pF/metre  
 inductance 1.12uH/metre  
 directionality--signal flow in  
 print read direction

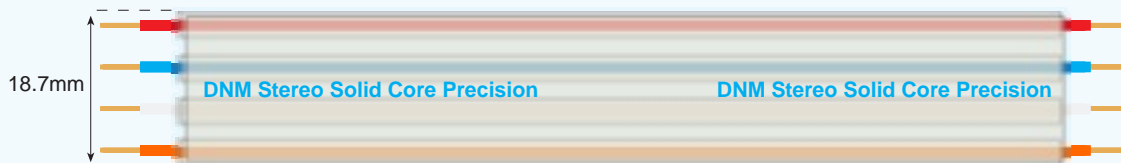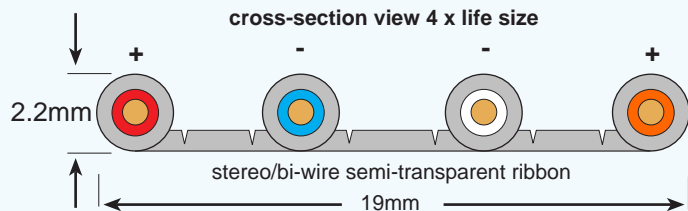

### DNM Stereo Solid Core Interconnect cable

#### specifications

unshielded type  
 4 x 0.4mm diameter conductors  
 resistance 0.134 ohms/metre  
 capacitance 13.2pF/metre  
 inductance 1.32uH/metre  
 directionality--signal flow in  
 print read direction

